



STATUS[®]



Power tools 2027

CLASSIFICATION

PROFESSIONAL

The dominant line in STATUS power tools range. High efficiency and quality power tools, gearbox housings are made of aluminum or magnesium alloys. Switches and other components possess increased durability. Recommended for construction operations and as a professional tool.

HD PROFESSIONAL

Highly durable and reliable tools built for continuous operation. Recommended for usage by professionals during construction works in severe industry environment.

CONTENTS

- 5** Cordless tools
- 22** Drills
- 23** Rotary hammers
- 26** Angle grinders
- 30** Sanders
- 32** Jig saws
- 34** Routers

SYMBOLS

	Two stage reducing gear		Aluminum alloy gear housing		Professional cable with the neoprene coating, min. 3 m. long		Constant electronics
	Two speed gearbox		Magnesium alloy gear housing		Supplied with carrying case		Spindle lock function
	Drilling		Safety clutch		Adjustable pendulum cutting action		Tool-less wheel guard adjustment function
	Drilling Drilling with impact		SDS-plus accessory mounting system		Rubber soft grip handle		3-position front handle
	Drilling Drilling with impact Impact		SDS-max accessory mounting system		Keyless chuck		Rotatable rear handle
	Reverse function		30 mm hexagonal accessory mounting system		Keyless metal chuck		Double insulation
	Electronic speed adjustment		Built-in dust removal system		Supplied with two 2 battery packs		Tool-free chaintension function
	Soft start		Cutting line laser marker		Charge time - 1 hour		LED working area illumination



Brushless tools system UniOne 20V

UniOne 20 V

BRUSHLESS



BLDC motor


All **UniOne** system tools are equipped with a brushless motor. The operating principle of a brushless BLDC motor (brushless direct current motor) is to rotate the rotor in an alternating magnetic field, which is created by alternating magnetization of the stator elements. This process is controlled by high-precision electronics. The advantages of the system include:

Energy efficiency

The BLDC motor provides an efficiency gain of more than 30% compared to a brushed motor. This is achieved due to more accurate and efficient operation of the electronics, since the controlled element is the stator electromagnets, not the brushes.

Life time

Since there is no brush wear, no sparking, and no heating of the commutator, a BLDC motor is tens of times more durable than a brush motor.

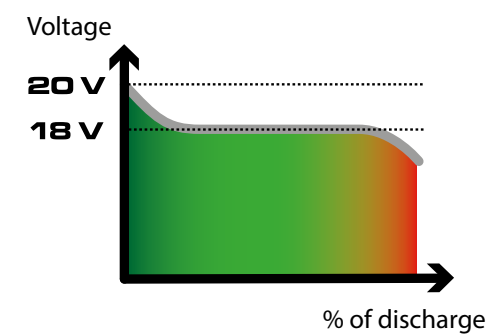

UniOne Li-Ion 20 V

The voltage characteristic of 20 V is the peak value of a fully charged battery.

The nominal (operating) voltage of the **UniOne** battery is 18 V.

Batteries



Model	ABCTW24Li	ABCTW24Li	ABCTW24-2Li
Voltage	20 V	20 V	20 V
Type	Li-Ion	Li-Ion	Li-Ion
Capacity	4 Ah	4 Ah	8 Ah
Code	0 77 222 01	0 77 222 02	0 77 229 01

Chargers



Model	CBCTW24Li	CBCTW24Li-1
Code	0 76 121 01	0 76 129 01

Cordless drill-driver
CTW24Li



Features

- Brushless motor
- Powerful high torque drill/driver
- All-metal keyless chuck 13 mm
- Auxiliary handle
- Automatic spindle lock
- Two speed low noise transmission
- Torque adjustment
- Built-in illumination of the work area
- Anti-vibration system on the housing
- Reverse
- Speed control
- Ergonomic rubber grip over
- Belt clip
- 4 Ah Li-Ion slider battery
- Charge level indicator
- Hand strap

Voltage	20 V
No load speed	0-600/0-2100/min.
Chuck/holder	Keyless, 13 mm
Torque (hard/soft)	75/50 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 20 V, 4 Ah
Charging time	120 min.
Weight	1,9 kg
Code	0 71 259 01


Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Belt clip









Cordless drill-driver
CBL20-2Li



Features

- Brushless motor
- All-metal keyless chuck 13 mm
- Compact design allows use in confined spaces
- Automatic spindle lock
- Two speed transmission
- Clutch torque adjustment
- Built-in illumination of the work area
- Reverse
- Speed control
- Ergonomic rubber grip over
- Belt clip
- Protective strip
- 2 Ah Li-Ion slider battery with charge level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-400/0-1400/min.
Chuck/holder	Keyless, 13 mm
Torque (hard/soft)	50/32 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 20 V
Weight	1,3 kg
Code	0 71 261 01


Set

- Li-Ion Battery 2 Ah, 2 pcs.
- Charger
- Plastic carry case
- Belt clip









Cordless drill-driver

CBL21Li



Features

- Brushless motor
- All-metal keyless chuck 13 mm
- Compact design allows use in confined spaces
- Automatic spindle lock
- Two speed transmission
- Clutch torque adjustment
- Built-in illumination of the work area
- Reverse
- Speed control
- Ergonomic rubber grip over
- Li-Ion slider battery with charge level indicator
- Belt clip
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-460/0-1900/min.
Chuck/holder	Keyless, 13 mm
Torque (max.)	60 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 20 V
Weight	0,95 kg
Code	0 71 266 01


Set

- Li-Ion Battery 2 Ah, 1 pcs.
- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Belt clip









Cordless impact wrench

CBL21HLi



Features

- Brushless motor
- High torque
- Impact function for working with large diameter fasteners
- Reversible function
- Aluminium alloy transmission housing
- Two maximum speed modes
- Built-in illumination of the work area
- 1/2" square bore drive for use with impact sockets and friction ring
- 1/4" hex holder for using bits
- Ergonomic rubber grip over
- 4 Ah Li-Ion slider battery with charge level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	1800/2700/min.
Impact rate	2100/2400/min.
Torque (max.)	350 Nm
Battery	Li-Ion, 20 V
Chuck/holder	square 1/2" ; hex 1/4"
Weight	1,75 kg
Code	0 74 122 01


Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Head
- Bits
- Belt clip









Cordless rotary hammer SDS+
MPB20



Features

- Brushless motor
- 3-position operating mode switch
- SDS+ accessory mounting system
- Reverse
- Built-in illumination of the work area
- Auxiliary handle
- Ergonomic rubber grip over
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-1400/min.
Impact rate(max.)	4500/min.
Impact energy	1,7 J
Battery	Li-Ion, 20 V
Weight	2,65 kg
Code	0 14 101 01


Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Auxilliary handle
- Depth gauge

BRUSHLESS



HD PROFESSIONAL



Cordless trimmer
RH750BL



Features

- Brushless motor
- Safety switch with lock-on feature
- Soft start
- Electronic speed control
- Constant speed under load
- Spindle lock for quick bit changes
- Routing depth adjustment
- Removable cast aluminum base
- Usable with plunge or tilt base
- Rip fence and roller fence included
- Dust extraction port included
- 4 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Height	226 mm
No load speed	10000-30000/min.
Cutter Shank Diameter	Ø6, Ø8 mm
Battery	Li-Ion, 20 V
Weight	2 kg
Code	0 51 511 01


Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Rip fence
- Roller fence
- Dust extraction port
- 6 mm collet
- 8 mm collet
- Wrench
- Plastic carry case

BRUSHLESS



PROFESSIONAL



Cordless jig saw
JS800BL



Features

- Brushless motor
- Quick saw blade change system
- Electronic dual stroke rate control
- Four-position pendulum mode switch
- Cutting area airflow with switch-off option
- Cast aluminum soleplate
- Switch lock-on position
- Non-slip rubberized handle
- Plastic soleplate
- 2 Ah Li-Ion slider battery with charging level indicator
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	800-3500/min.
Max. cutting capacity	
- wood	100 mm
- metal	10 mm
Stroke length	23 mm
Battery	Li-Ion, 20 V
Weight	1,9 kg
Code	0 74 121 02

Set

- Li-Ion Battery 2 Ah, 1 pcs.
- Charger
- Parallel fence
- Wrench
- Vacuum cleaner connection
- Plastic soleplate
- Anti-splinter plate
- Plastic carry case











Cordless angle grinder
SC125BLS



Features

- Brushless motor
- Electronic speed control
- Keeping constant speed in low speed mode
- Soft start
- Auxiliary handle
- Spindle lock
- Aluminium gearbox
- 2-position front handle
- Ergonomic rubber grip over
- 4 Ah Li-Ion slider battery
- Charge level indicator
- Deattachable ventilation slots

Voltage	20 V
No load speed	3000-8500/min.
Spindle thread	M14
Blade size	125 mm
Battery	Li-Ion, 20 V, 4 Ah
Weight	2,3 kg
Code	0 74 124 01

Set

- Li-Ion Battery 4 Ah, 1 pcs.
- Charger
- Plastic carry case
- Auxilliary handle











Cordless rceiproccating saw
RS800BL



Features

- | Long-lasting brushless motor
- | Quick saw blade change systems
- | Rubber-coated front and rear handles
- | Pendulum mode switch
- | Front stop adjustable in steps
- | On/off switch with a safety lock to prevent accidental operation
- | Dual stroke frequency adjustable by pressing the switch button
- | Hanging storage bracket
- | 4 Ah Li-Ion slider battery with charging level indicator
- | STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	0-3000/min.
Stroke length	29 mm
Max. cutting capacity	
- wood	200 mm
- metal	60 mm
Battery	Li-Ion, 20 V
Weight	2,7 kg
Code	0 74 120 02


Set

- | Li-Ion Battery 4 Ah, 1 pcs.
- | Charger
- | Saw blade









Cordless grass trimmer
DB20CB-20 Kit



Features

- | Brushless motor
- | Two speed settings: for line and for blade
- | Under-mounted motor (no flexible drive)
- | Battery level indicator
- | Shock-resistant protective shield
- | Safety strap
- | Folding design
- | Adjustable intermediate handle
- | 4 Ah Li-Ion slider battery with charging level indicator
- | STATUS UniOne and LXT Unified Battery System

Voltage	20 V
No load speed	
- line	5500/min.
- blade	7500/min.
Cutting width	
- line	330 mm
- blade	250 mm
Line thickness	1,6 mm
Battery	Li-Ion, 20 V
Weight	3,8 kg
Code	0 74 112 02

Set

- | Li-Ion Battery 4 Ah, 1 pcs.
- | Charger
- | Spool of line

- | Knife
- | Screws
- | Wrench
- | Belt









Cordless chain saw
SCB300-20 Kit



- Features**
- Brushless motor
 - Accidental start protection
 - Safety guard with instant brake activation
 - Automatic chain lubrication
 - Tool-free chain tensioning
 - Ergonomic rubberized handle provides a perfect grip
 - 4 Ah Li-Ion slider battery with charging level indicator
 - STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Rotation Speed	3500/min.
Chain Speed (Max.)	10 m/s²
Bar Length	300 mm (12")
Chain Pitch	3/8"
Number of Chain Links	45
Groove Width	1,3 mm
Battery	Li-Ion, 20 V
Weight	4 kg
Code	0 74 108 02

- Set**
- Li-Ion Battery 4 Ah, 1 pcs.
 - Charger
 - Bar
 - Chain
 - Safety hood



Cordless chain saw
SCB251-20 Kit



- Features**
- Brushless motor
 - Accidental start protection
 - Safety guard with instant brake activation
 - Automatic chain lubrication
 - Tool-free chain tensioning
 - Ergonomic rubberized handle provides a perfect grip
 - 4 Ah Li-Ion slider battery with charging level indicator
 - STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Rotation Speed	2600/min.
Chain Speed (Max.)	7 m/s
Bar Length	250 mm (10")
Chain Pitch	3/8"
Number of Chain Links	40
Groove Width	1,1 mm
Battery	Li-Ion, 20 V
Weight	2,1 kg
Code	0 74 123 02

- Set**
- Li-Ion Battery 4 Ah, 1 pcs.
 - Charger
 - Bar
 - Chain
 - Safety hood



Cordless chain saw

SCB201-20

(only body without battery and charger)



Features

- Brushless motor
- Keyless chain tension adjustment
- Safety hilt on the front handle
- Automatic chain lubrication
- Accidental start protection
- Ergonomic rubberized handle
- STATUS UniOne and LXT Unified Battery System

Voltage	20 V
Rotation Speed	4600/min.
Chain Speed (Max.)	8 m/s
Bar Length	200 mm (8")
Chain Pitch	1/4"
Number of Chain Links	45
Groove Width	1.1 mm
Battery (not included)	Li-Ion, 20 V
Weight	1,4 kg
Code	0 74 117 01

Set

- Bar
- Chain
- Safety hood

 BRUSHLESS

 20V Lithium-Ion UNI ONE

 GARDEN

Cordless chain saw

CP115



Features

- Brushless motor
- Suitable for trimming trees
- Accidental start protection
- Removable protective cover
- Ergonomic handle with rubber provides perfect grip over
- Compact 2 Ah Li-Ion battery
- Charge level indicator

Voltage	16 V
No load speed	4600/min.
Chain speed (max.)	6,7 m/s
Bar length	100 mm
Chain pitch	1/4"
Number of chain links	28
Battery	Li-Ion, 16 V, 2 Ah
Weight	1,2 kg
Code	0 74 106 01

Set

- Li-Ion Battery 2 Ah, 2 pcs.
- Charger
- Bar
- Chain
- Safety hood

 2 Ah BRUSHLESS

 HD PROFESSIONAL



Cordless drill-driver
CBL12Li



Features

- Brushless motor
- Single sleeve chuck 10 mm
- Compact design allows use in confined spaces
- Automatic spindle lock
- Two speed low noise transmission
- Clutch torque limit adjustment
- Built-in illumination of the work area
- Reverse
- Speed adjustment by pressing the start switch
- Ergonomic handle with rubber provides perfect grip over
- Compact 2 Ah Li-Ion battery
- Charge level indicator

Voltage	12 V
No load speed	0-400/0-1400/min.
Chuck/holder	Keyless, 10 mm
Torque (hard/soft)	38/24 Nm
Torque adjustment steps	20 + 1
Battery	Li-Ion, 12 V, 2 Ah
Weight	1 kg
Code	0 71 263 01


Set

- Li-Ion Battery 2 Ah, 1 pcs.
- Charger



 **BRUSHLESS**

PROFESSIONAL **2 Ah**



Cordless angle grinder
SH115E



Features

- Brushless motor
- Compact design for working in limited spaces
- The ergonomic rubberized handle ensures a perfect grip
- Compact 2 Ah lithium-ion battery
- Spindle lock function

Voltage	12 V
No load speed	20000 /min.
Spindle thread	M10
Blade size	75-76 mm
Battery	Li-Ion, 12 V, 2 Ah
Charging time	60 min.
Weight	0,65 kg
Code	0 74 107 01

Set

- Li-Ion Battery 2 Ah, 1 pcs.
- Charger
- Cutting blade, 3 pcs.



 **BRUSHLESS**

PROFESSIONAL **2 Ah**



Impact drill
DP950



DP950

Voltage	220-240 V~
Input power	950 W
No load speed	0-3000/min.
Chuck/holder	key, 13 mm
Drilling capacity max.	
- wood	25 mm
- steel	10 mm
- concrete	13 mm
Weight	2,4 kg
Code	0 21 427 01

PROFESSIONAL




- Set**
- Auxilliary handle
 - Depth gauge
 - Plastic case

Rotary hammer SDS-max
MPR70



HD PROFESSIONAL



Voltage	220-240 V~
Input power	1200 W
No load speed	300-600/min.
Max. Impact rate	3500/min.
Impact energy	10 J
Holder type	SDS-max
Drilling capacity	
- drill bit	42 mm
- core bit	85 mm
Weight	7,1 kg
Code	0 11 702 01

- Set**
- Auxilliary handle
 - Depth gauge
 - Drill bit
 - Plastic carry case

Brushless rotary hammer SDS+

MPR50BL



*Activates and shuts off the motor when jamming is detected, i.e., a sudden change in the drill's position relative to the drilling axis

Voltage	220-240 V~
Input power	1260 W
No load speed	1100/min.
Impact rate	5300/min.
Impact energy	7 J
Drilling capacity	
- drill bit	32 mm
- core bit	90 mm
Cable length	4 m
Weight	5,8 kg
Order code	0 12 814 01

Set

- Plastic case
- Wrench



Rotary hammer SDS+

MPR26




Voltage	220-240 V~
Input power	800 W
No load speed	0-1350/min.
Impact rate (max.)	5300/min.
Impact energy	3 J
Drilling capacity	
- drill bit	26 mm
- core bit	68 mm
Cable length	3 m
Weight	2,8 kg
Order code	0 12 813 01

Set

- Plastic case
- Drill bit set (6, 8, and 10 mm)
- Pick
- Chisel
- Additional handle
- Drilling depth gauge
- Spare brush set



Brushless angle grinder
SA230BL

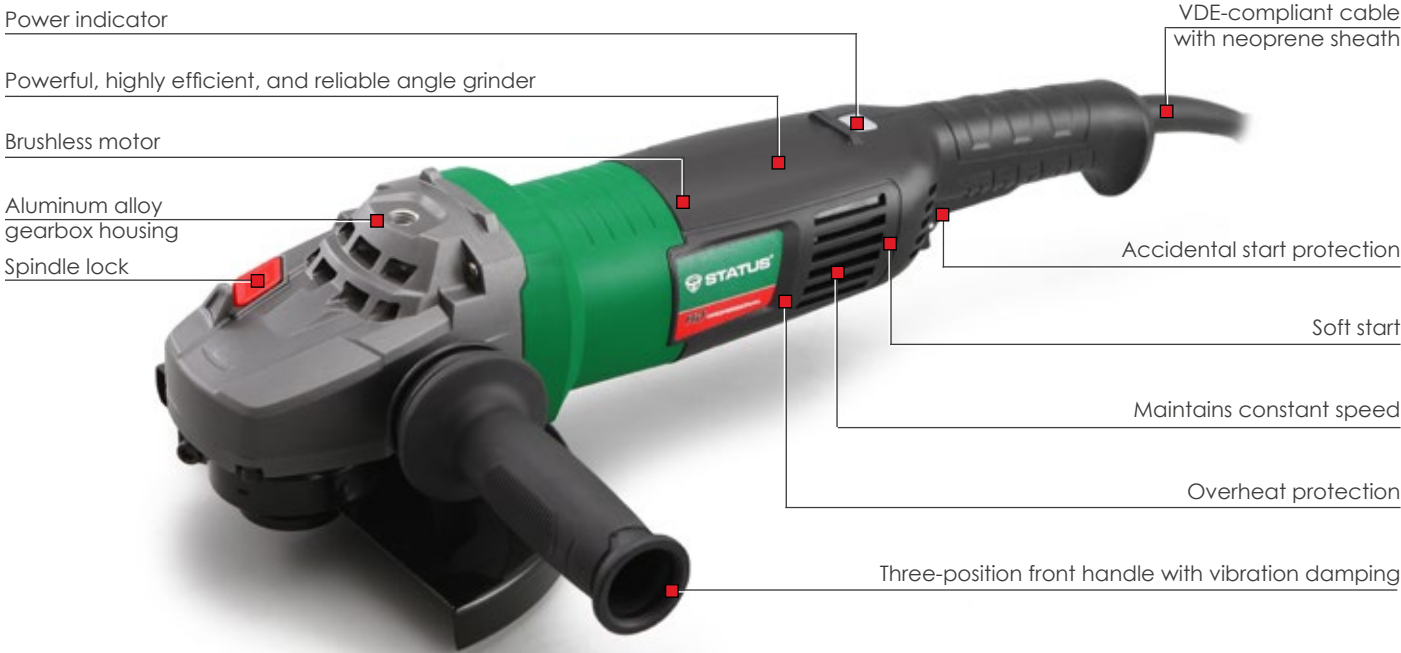

Voltage	220-240 V~
Power	2800 W
Rotation Speed	6500/min.
Spindle Thread	M14
Disc Diameter	230 mm
Weight	5,75 kg
Cable Length	4 m
Code	0 30 532 01





- Set
- Front handle
 - Wrench
 - Protective cover



Brushless angle grinder
SA125BLE



Voltage	220-240 V~
Power	1300 W
Rotation Speed	2880-11000/min.
Spindle Thread	M14
Disc Diameter	125 mm
Weight	1,3 kg
Cable Length	3 m
Code	0 30 530 01





- Set
- Front handle
 - Wrench
 - Protective cover



Angle grinder

SH1251CSE



Voltage	220-240 V~
Power	1500 W
Rotation Speed	4000-11000/min.
Spindle Thread	M14
Disc Diameter	125 mm
Weight	2,7 kg
Cable Length	3 m
Code	0 30 531 01

Set

- Front handle
- key
- protective cover



Angle grinder

SH1252SE



Voltage	220-240 V~
Power	1200 W
Rotation Speed	4000-11000/min.
Spindle Thread	M14
Disc Diameter	125 mm
Weight	2,7 kg
Cable Length	3 m
Code	0 30 533 01

Set

- Front handle
- key
- protective cover



Orbital sander
XS3-125ET




Voltage	220-240 V~
Input power	450 W
No load speed	4000-13500/min.
Orbit	5 mm
Pad size	Ø125 mm
Weight	2,1 kg
Code	0 36 108 01

Set

- I Dust collector
- I Sheet of sandpaper

PROFESSIONAL



Multi-purpose sander
XS2-125




Voltage	220-240 V~
Input power	220 W
No load speed	14000-24000/min.
Orbit	1,8 mm
Weight	1,4 kg
Code	0 36 107 01

Set

- I Sanding pads, 4 pcs
- I Dust container, 1 pcs
- I Sandpaper

PROFESSIONAL



Jig saw
JS801



Voltage	220-240 V~
Power	750 W
Stroke Rate	0-3000/min.
Max. Cutting Depth	
- Wood	120 mm
- Steel	8 mm
Stroke Length	26 mm
Weight	2,9 kg
Code	0 41 912 01

Set

- Parallel fence
- Key
- Vacuum cleaner connection
- Plastic soleplate
- Anti-splinter plate

PROFESSIONAL



Circular saw
CP185



Features

- Aluminum alloy platform
- Cutting depth adjustment (0-65 mm)
- Cutting angle adjustment (0-45°)
- Spindle lock function
- Rubberized grip handles

Voltage	220-240 V
Input power	1300 W
No load speed	4500/min.
Blade size	Ø185x20 mm
Max. cutting capacity	65 mm
Weight	4,3 kg
Code	0 40 713 01

Set

- Guide fence
- Hex wrench
- Cutting disc

PROFESSIONAL



Router
RH1400CE

Electronic speed control with LCD display



Voltage	220-240 V~
Power	1400 W
Rotation speed	12000-28000/min.
Cutter shank diameter	Ø8, Ø12 mm
Milling depth	55 mm
Weight	3,6 kg
Order code	0 51 513 01

- Set
- | Rip fence
 - | Dust extraction nozzle
 - | 12 mm collet
 - | 8 mm bushing
 - | Copying bushing
 - | Wrench

PROFESSIONAL



Trimmer
RH751

Features

- | Soft start
- | Electronic speed control with LCD display
- | Maintains constant speed under load
- | Spindle lock for quick cutter changes
- | Routing depth adjustment
- | Removable cast aluminum alloy base
- | Safety switch with lock-on function
- | Usable with plunge or tilt base
- | Rip fence and roller fence included
- | Dust extraction pipe included
- | Removable brush covers

Voltage	220-240 V~
Power	750 W
Rotation speed	13000-33000/min.
Cutter shank diameter	Ø6, Ø8 mm
Weight	1,9 kg
Code	0 51 512 01

Set

- | Rip fence
- | Roller fence
- | Dust extraction port
- | 6 mm collet
- | 8 mm collet
- | Additional detachable handles
- | Wrench

PROFESSIONAL



Additional bases for trimmers RH750BL and RH751

Plunge base



Code	0 52 605 01
------	-------------


Tilt base



Code	0 52 606 01
------	-------------



STATUS®



STATUS Italia s.r.l.

Via Aldo Moro, Nr. 14/A

IT36060 - Pianezze

Zona industriale, (VI), ITALY

e-mail: office@status-tools.eu

sales@status-tools.com



Electric tools STATUS comply with the current directives and harmonized standards of the European Union.

STATUS Italia s.r.l. reserves the right to introduce changes in the technical specifications and packaging of the products for the purpose of product improvement and optimization.