



STATUS[®]






STATUS polishing machines are divided into two types:

Simple rotational action (PA)

Machines in which the support circle rotates around the central axis of the drive shaft. This type of movement is characterized by a high penetrating effect and, if used carelessly, can cause overheating of the surface, as well as create a hologram effect.



Removal rate


Scratch removal efficiency

Removing of holograms

Creation of holograms

Orbital Rotational action (XPA)

The central axis of the support circle rotates around the axis of the drive shaft in an orbit. The circle moves randomly around its axis, with variable speed and direction, determined by centrifugal forces and friction on the working surface. When the rotation stops, it creates only an orbital (oscillatory) effect. This type of movement is the best compromise in terms of efficiency and surface finish.



Removal rate

Scratch removal efficiency

Removing of holograms

Creation of holograms




Cordless polishers

Cordless multi polisher
CXP12-50Li



3 modes:

- Random orbital rotation **12 mm**
- Random orbital rotation **3 mm**
- Simple rotation

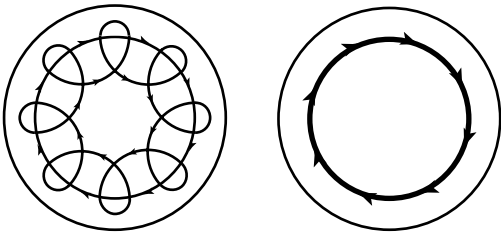

Variable speed adjustment



Lock-on switch



Voltage	12 V DC
No load speed	2000-5500/min.
Pad size	38, 50 mm
Orbit	0/3/12 mm
Thread	M6x1
Battery	Li-Ion, 12 V, 2 Ah
Weight	1 kg
Code	0 33 911 01



- Battery Li-Ion 12 V, 2 Ah - 2 pcs.
- Charger
- Backing pad (38 mm)
- Backing pad (50 mm)
- Counterweight 12 mm
- Counterweight 3 mm
- Extension rod
- Polishing pad (sponge) - 20 pcs.
- Polishing pad (faux wool) - 12 pcs.
- Polishing pad (brush) - 2 pcs.
- Wrench
- Fabric case



Cordless random orbital polisher/sander

CXP75Li

Removable backing pads with Velcro



Orbital action and a powerful **brushless motor** work together to deliver quiet, low-vibration operation, even during extended use.

Soft start, constant speed control, and precise trigger-activated **speed adjustment** enable comfortable one-handed use, giving you full command over the tool. The 5-position speed limiter lets you set the maximum RPM in advance, preventing accidental over-speeding.

The kit includes **interchangeable pads** for maximum versatility – from automotive polishing to detailing tight spots and small curved surfaces.

The machine comes in a durable **carrying case** with a comprehensive set of polishing attachments, so you're ready to work right out of the box.



Cordless multi polisher/sander

CXP12-75Li



The machine features a quick-change head mechanism. It comes with one rotary head and two eccentric heads (3 and 12 mm). This functionality allows one tool to be used for various tasks: from coating removal to finishing.

The brushless motor ensures efficient operation with minimal vibration for maximum operator comfort.

Soft start, constant speed maintenance, and precise speed control via the trigger switch allow comfortable one-handed operation, providing full control over the tool.

The 5-position speed limiter lets you preset the maximum RPM, preventing accidental overspeed.

The kit includes interchangeable polishing pads and discs for maximum versatility – from car polishing to working on hard-to-reach areas and small curved surfaces.

The machine comes in a durable **carrying case** with a comprehensive set of polishing attachments, so you're ready to work right out of the box.

Voltage	12 V DC
No load speed	2000-6000/min.
Pad size	Ø30/50/75 mm
Orbit	0/3/12 mm
Thread	M6x1
Battery	Li-Ion, 12 V, 2.5 Ah
Weight	1 kg
Code	0 33 918 01



Set

- Battery 12 V 2.5 Ah, 2 pcs.
- Charger
- Front handle
- Sponge set
- Sandpaper set
- Lollipop sponge set
- Rotary head
- Orbital head (3 mm orbit)
- Orbital head (12 mm orbit)
- Backing plate 30 mm
- Backing plate 50 mm
- Backing plate 75 mm
- Wrench
- Extension rod, 2 pcs.
- Plastic case

BRUSHLESS


HD PROFESSIONAL





Cordless rotary polisher

PA150L



- | Electronic speed control
- | Deattachable ventilation slots



- | Lock-on switch
- | Overload indicator

- | Brushless motor
- | Soft start
- | Constant speed
- | Spindle lock button
- | Aluminum gear housing
- | Velcro polishing attachment
- | Rubberized handle
- | Status UniOne battery system

Voltage	20 V DC
No load speed	500-3500/min.
Pad size	Ø150 mm
Spindle thread	M14
Battery	Li-Ion, 20 V, 4 Ah
Weight	2,3 kg
Code	0 33 915 01



BRUSHLESS

HD PROFESSIONAL



- | D-handle
- | Backing pad (150 mm)
- | Sheepskin attachment
- | Battery Li-Ion 4 Ah
- | Charger
- | Wrench
- | Plastic case



Polishers

Rotary polisher
PA125CE

Compact and easy-to-grip body

Rubber pad for installation on the table when taking a break from work

Ergonomic grip ergonomic handle


Variable speed and soft start

Constant speed

Lock-on switch

Fastening of the polishing pad with Velcro

5 meters 




75 mm 125 mm



Voltage	220-240 V~
Input power	750 W
No load speed	800-2500/min.
Pad size	75 & 125 mm
Spindle thread	M14
Weight	2 kg
Cable length	5 m
Code	0 33 907 01

HD PROFESSIONAL



- T-shape handle
- D-shape handle
- Backing pad (75 mm)
- Backing pad (125 mm)



Polishers

Rotary polisher
PA150CE




5 meters 



150 mm

180 mm



Voltage	220-240 V~
Input power	1200 W
No load speed	450-1700/min.
Pad size	150 & 180 mm
Spindle thread	M14
Weight	2,6 kg
Cable length	5 m
Code	0 33 906 01

HD PROFESSIONAL



- T-shape handle
- D-shape handle
- Backing pad (150 mm)
- Backing pad (180 mm)




Polishers

Rotary polisher
PA180CE




5 meters 



Voltage	220-240 V~
Input power	1500 W
No load speed	600-3000/min.
Pad size	180 mm
Spindle thread	M14
Weight	3 kg
Cable length	5 m
Code	0 33 909 01

HD PROFESSIONAL




- T-shape handle
- D-shape handle
- Backing pad (180 mm)
- Polishing pad (faux wool)
- Sandpaper
- Wrench



Random orbital polisher
XPA12-75



5 meters 



50 mm 75 mm



Voltage	220-240 V~
Input power	750 W
No load speed	2000-5500/min.
Pad size	50, 75 mm
Orbit	12 mm
Thread	5/16 -2 4T
Weight	2,3 kg
Code	0 33 910 01

HD PROFESSIONAL



- T-shape handle
- D-shape handle
- Backing pad (50 mm)
- Backing pad (75 mm)
- polishing pads (sponge)




Random orbital polisher

XPA9-125E



5 meters 



75 mm 125 mm



PROFESSIONAL



Voltage	220-240 V~
Input power	700 W
No load speed	2000-6400/min.
Pad size	75 & 125 mm
Orbit	9 mm
Thread	5/16 -2 4T
Weight	2,5 kg
Code	0 33 912 01


- Backing pad 125 mm
- Backing pad 75 mm
- T-shape handle
- D-shape handle
- Polishing pad (sponge)
- Wrench



Random orbital polisher
XPA 12-125CE




5 meters 



Voltage	220-240 V~
Input power	750 W
No load speed	2000-5500/min.
Pad size	125 mm
Orbit	12 mm
Weight	2,7 kg
Code	0 33 913 01

HD PROFESSIONAL



- | Backing pad (125 mm)
- | T-shape handle
- | D-shape handle
- | Polishing pad (sponge)
- | Wrench




Random orbital polisher

XPA15-150CE




5 meters 

125 mm 150 mm



Voltage	220-240 V~
Input power	900 W
No load speed	2000-4200/min.
Pad size	125, 150 mm
Orbit	15 mm
Weight	2,6 kg
Code	0 33 904 01

HD PROFESSIONAL



- I T-shape handle
- I D-shape handle
- I Backing pad (125 mm)
- I Backing pad (150 mm)
- I Wrench



Polishers

Random orbital polisher

XPA21-150CE


XPA15-125CE



Random orbital rotation **15 mm (XPA15-125CE)**

Random orbital rotation **21 mm (XPA21-150CE)**

5 meters 



	XPA15-125CE	XPA21-150CE
Voltage	220-240 V~	220-240 V~
Input power	1000 W	1000 W
No load speed	2000-4800/min.	2000-4800/min.
Pad size	125 mm	150 mm
Orbit	15 mm	21 mm
Weight	3 kg	3 kg
Code	0 33 914 01	0 33 908 01



- T-shape handle
- D-shape handle
- Backing pad

Random orbital sander

XS5-150BL



- | Brushless motor
- | LCD display of rotation speed
- | Brushless motor
- | Electronic speed control
- | Soft start
- | Constant speed
- | Velcro fastening of sanding paper
- | Ergonomic rubberized handle
- | Dust removal system with the ability to connect a vacuum cleaner
- | Fabric dust container

Voltage	220-240 V~
Input power	500 W
No load speed	4000-8000/min.
Orbit	5 mm
Pad size	Ø150 mm
Weight	2 kg
Code	0 33 916 01

BRUSHLESS

HD PROFESSIONAL



- | Dust collector container
- | Vacuum cleaner adapter
- | Wrench
- | Plastic case



Random orbital sander

XS5-150ET



5 meters

- | Electronic speed control
- | Soft start
- | Constant speed
- | Velcro fastening of sanding paper
- | Ergonomic rubberized handle
- | Dust removal system with the ability to connect a vacuum cleaner
- | Fabric dust container

Voltage	220-240 V~
Input power	500 W
No load speed	5000-10000/min.
Orbit	5 mm
Pad size	Ø125, 150 mm
Weight	1,7 kg
Code	0 36 109 01




HD PROFESSIONAL



- | Dust collector container
- | Wrench
- | Backing pad (125 mm)
- | Backing pad (150 mm)



STATUS®



STATUS ITALIA S.R.L.

Via Aldo Moro, Nr. 14/A

IT36060 - Pianezze

Zona industriale, (VI), ITALY

e-mail: office@status-tools.eu

sales@status-tools.com

www.status-tools.com